


Balancer board

isoSPI

The balancer boards were developed for integration into battery packs. They assure safe operation by continuously monitoring operating temperatures and voltages of individual cells and balancing the charging level between the cells to identify and avoid critical levels.

Part no.: 4260629980060

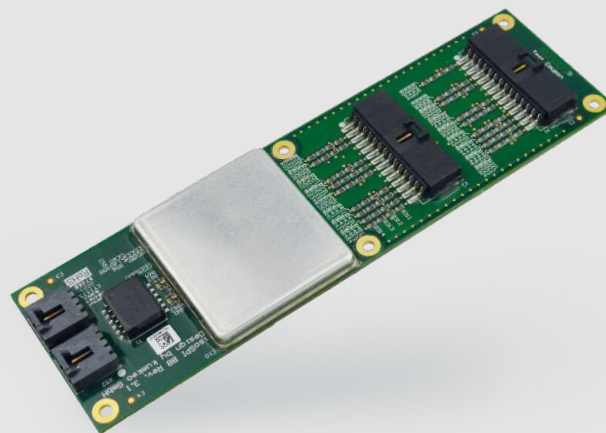

SPECIFICATION

Measuring chip:	LTC6813-1 analog device IC
Cells per unit	3-18 cells
Communication interface	isoSPI DaisyChain max. 5 m
Balancing process	Passive
Cell balancing	Nominal 80 mA
Measuring range	-0.3 to 5.5 V DC per cell
Measuring deviations	Max. ± 2.2 mV
Cell voltage, typ. sample rate	16 ms
Temperature measurement, connection to the cells	Max. 4x NTC, 10 k Ω , B3380K @25 °C
Temperature measurement onboard	1x NTC, 10 k Ω , B3380K @25 °C
Temperature measuring range	-40 °C to +85 °C
Measuring deviation	± 1.5 °C
Ambient operating temperature:	-40 °C to 85 °C

SUPPLY

Power supply	Integral and via the connected cells
Cell voltage range	0 to 5 V DC
Max. input current (isoSPI disabled)	5.6 μ A to 5.9 μ A
Max. input current (isoSPI enabled)	8.0 mA to 8.5 mA

INTERFACES

Power supply	2x Molex, part no.: 15912145
PROFINET IO controller	2x TE, part no.: 5-104361-3

SAFETY

Coating	ELPEGUARD® protective coating SL 1307 FLZ
----------------	---

MECHANICAL DATA

Attachment	6x M4 screws
Dimensions	52x180x10 mm
Weight	~ 50 g

AMBIENT CONDITIONS

Vibration DIN EN 60068-2-6	2 Hz - 9 Hz & 9 Hz - 200 Hz: 1.5 mm with constant acceleration
Shock DIN EN 60068-2-27	50 m/s ² for 6 ms
Ambient storage/transport temperature	-40 °C to 85 °C
Relative humidity	5 % to 85 % without condensation
Altitude for operation	<3000 m above sea level
Protection rating	IP 20 (as per DIN EN 60529)
Protection class	III

COMPLIANCE WITH EMC DIRECTIVE 2014/30/EU

Discharge of static electricity According to EN 61000-4-2	Contact discharge: 4 kV Air discharge: 8 kV
Electromagnetic fields According to EN 61000-4-3	80 MHz to 1 GHz 10 V/m 1.4 GHz to 1.6 GHz and 1.8 GHz to 2.2 GHz 2.4 GHz to 2.5 GHz and 5.1 GHz to 5.8 GHz 3 V/m 80 % AM (1 kHz)
Fast transients (burst) According to EN 61000-4-4	Signal connection: ±1 kV 5/50 ns 5 kHz repetition frequency Mains DC input: ±2 kV 5/50 ns 5 kHz repetition frequency

Conducted disturbances According to EN 61000-4-6	150 kHz to 80 MHz 10 V/m 80 % AM (1 kHz)
Emitted interference, casing According to CISPR 16-1-1 CISPR 16-1-4 CISPR 16-2-3	30 MHz - 230 MHz 40 dB (µV/m) quasi-peak value at 10 m 230 MHz - 1000 MHz 47 dB (µV/m) quasi-peak value at 10 m
Emitted interference, low voltage connection CISPR 16-1-1 CISPR 16-1-2 CISPR 16-2-1	0.15 MHz - 0.5 MHz 79 dB (µV/m) quasi-peak value 66 dB(µV/m) average 0.5 MHz - 30 MHz 73 dB (µV/m) quasi-peak value 60 dB(µV/m) average
EN 55032 Telecommunication connections	0.15 MHz - 0.5 MHz 74 dB (µV/m) quasi-peak value 74 dB - 64 dB (µV/m) average 0.5 MHz - 30 MHz 74 dB (µV/m) quasi-peak value 64 dB (µV/m) average

kumkeo GmbH
Heidenkampsweg 82a
20097 Hamburg, Germany

Phone +49 40 28467610
Fax +49 40 284676199

service@kumkeo.de
www.kumkeo.de